


胶带ADHESIVE TAPE



Note注解:

- Put Housing and 1 bags desiccant into PE bag that is without any holes and seal PE bag. Adhere a label on PE bag.
将 Housing和1包干燥剂放入PE袋内,PE袋不能有任何透气孔, 并将PE袋封口密封好.贴上标签.
- Put PE bag packed products in cartons, Packing detail see the table below
将装好产品的PE袋放入纸箱内, 详细包装见下表
- Label depends on customer request, carton opening joint with transparent tape
标签依客户要求而定, 纸箱开口处用透明胶带贴合.
- There shall be no dirt such as deformation phenomenon, Mantissa box fillers must be used
每箱不可有脏污, 变形现象, 尾数箱必须用填充物
- Carton material: K=K, Carton thickness: 6±1mm
纸箱材质:K=K, 纸箱厚度:6~7mm

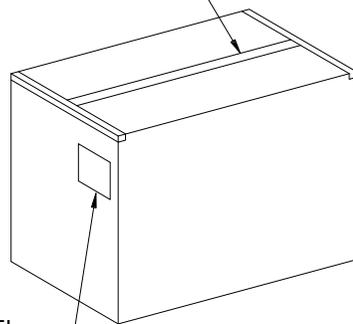

Poles	Bag PCS	Box PCS	Rough Weight Kg
02	1000	150K	14.5±0.5
03	1000	100K	14.5±0.5
04	1000	80K	14.5±0.5
05	1000	70K	14.5±0.5
06	1000	60K	14.0±0.5
07	1000	50K	12.5±0.5
08	1000	40K	13.0±0.5
09	1000	35K	13.0±0.5
10	1000	35K	13.5±0.5
11	1000	30K	14.0±0.5
12	1000	26K	13.0±0.5
13	1000	26K	14.0±0.5
14	1000	15K	9.0±0.5
15	1000	10K	6.5±0.5


				GENERAL TOLERANCE		东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., ltd.				PART NO. 2020H-1xXX-N0XBR01Q				
				.X ±0.30		APPROVAL				TITLE: 2.00mm Housing Packing				
				.XX ±0.20		CHECK				UNIT SCALE SHEET REV NUMBER				
				.XXX ±0.10		DRAWN				mm 1:1 1/1 A0 A-000				
				X° ± 2'		DATE				2016/08/26				
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	Yangzhengguo	Yangzhengyi	Lvtiansheng						



RoHS


包装图

RD-1

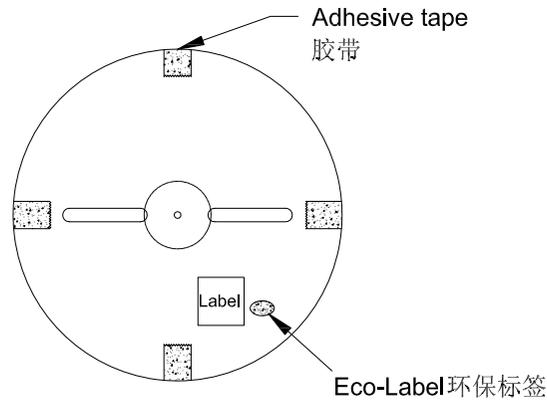

Note 注解:

- Quantity 数量:
10K PCS/REEL 一卷10K/PCS
10 REEL/BOX 一箱10卷
100K PCS/BOX 一箱100K/PCS
- Each reel and outer box must be labeled and Eco-Label Respectively labeled
每盘和外箱都必须有标签及环保标签分别标示
- Terminal winding direction as shown
端子缠绕方向如左图所示
- There shall be no dirt such as deformation phenomenon, Mantissa box fillers must be used
每箱不可有脏污, 变形现象, 尾数箱必须用填充物
- Carton material: K=K, Carton thickness: 6±1mm
纸箱材质:K=K, 纸箱厚度:6~7mm

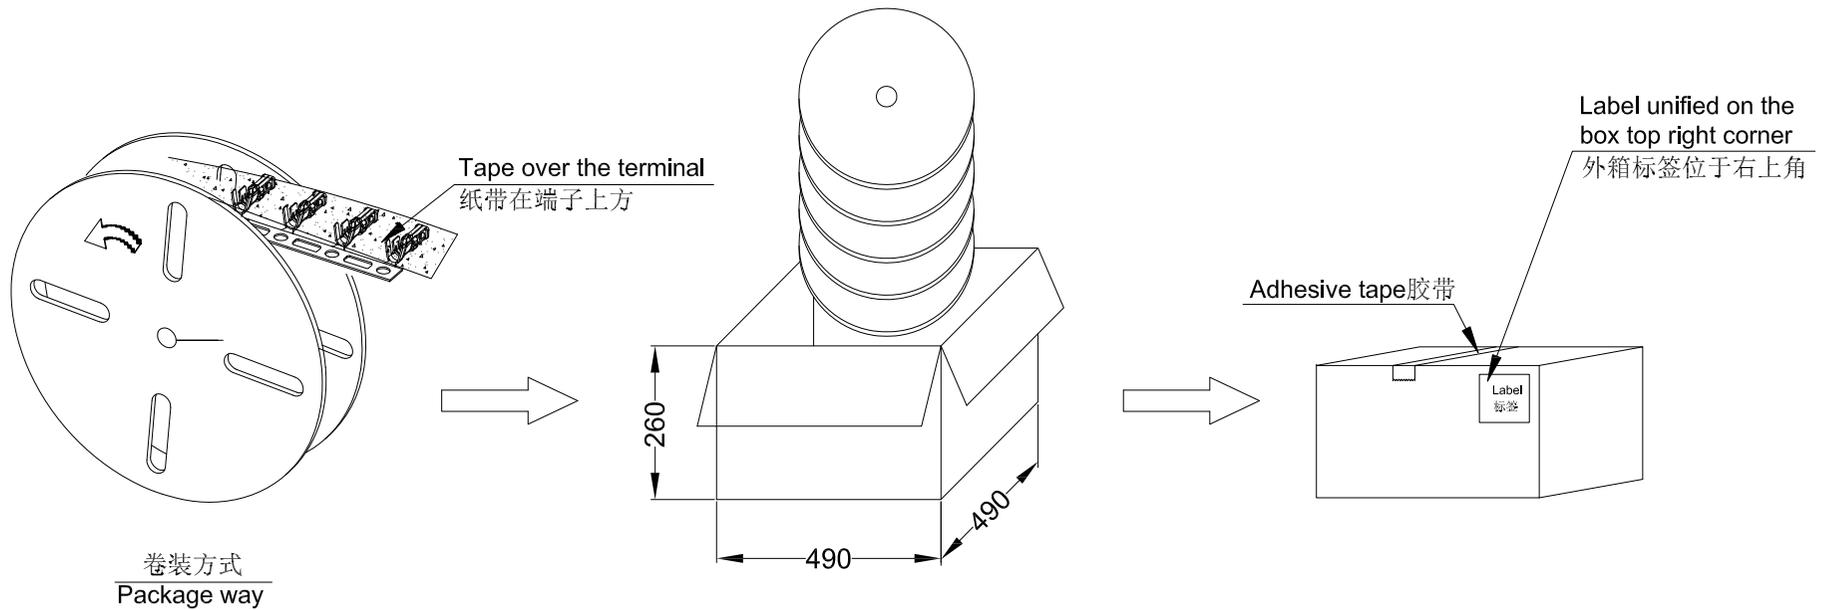

				GENERAL TOLERANCE		GYA 东莞市国亚电子有限公司 Connectors Dong Guan Guo Ya Connectors co., ltd.				PART NO. 2020T-PXXS-01Q				
				.X ±0.30		APPROVAL				TITLE: 2.00mm Terminal Packing				
				.XX ±0.20		CHECK				UNIT SCALE SHEET REV NUMBER				
				.XXX ±0.10		DRAWN				mm 1:1 1/1 A0 A-000				
				X° ±2'		DATE				2016/08/26				
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	Yangzhengguo	Yangzhengyi	Lvtiansheng						




RoHS 包装图




(08P~12P)后空20穴240mm
(13P~15P)后空32穴384mm

(08P~12P) 800 PCS 载带实用长度9600mm
(13P~15P) 600 PCS 载带实用长度7200mm



(08P~12P)前空44穴528mm
(13P~15P)前空32穴384mm

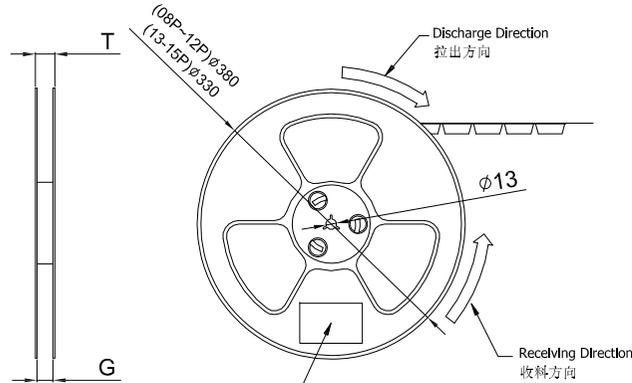

COVER TAPE PEEL STRENGTH:30~80g
上带剥离力量: 30~80g
速度 PEEL SPEED:300mm/minute

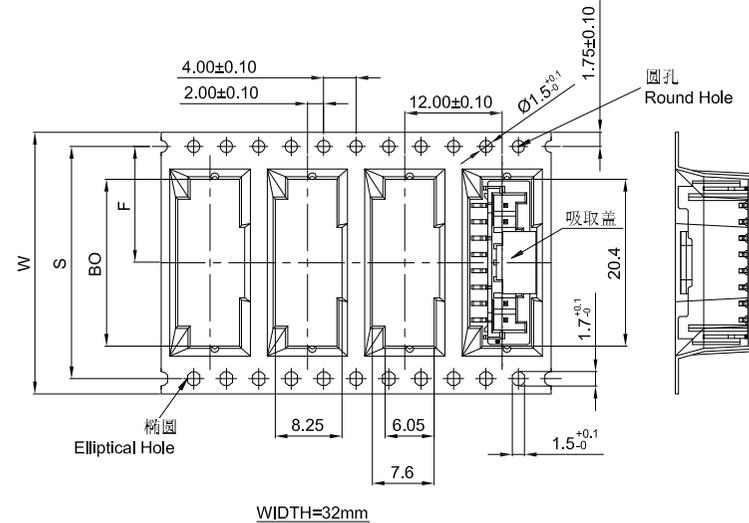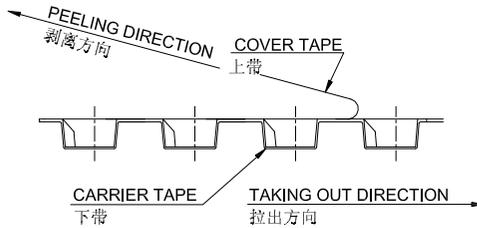

Lable 标签
Single hole: None Hole Side
单孔: 贴无链孔侧
Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧

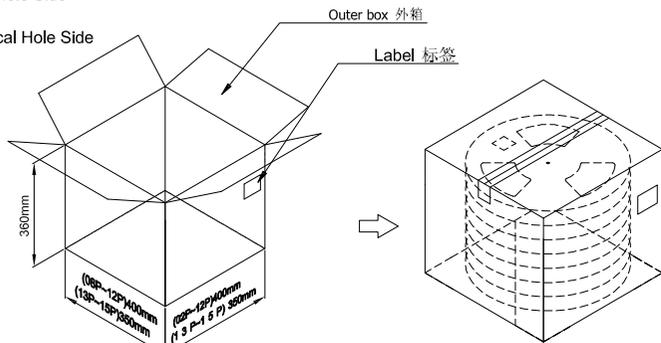

- Note:
- Carrier Camber Is Within 1mm In 100mm ; 带长100mm内容许弯曲度1mm
 - 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距离累计允许公差为±0.2mm
 - Carrier tape Material for PS ; 下带材质为PS材质; Color颜色: Natural透明色
 - Bracer保护带: Color颜色: Natural透明色; 厚度0.40mm最小
 - Thinkness=0.50±0.05 ; 材料厚度为0.50±0.05mm
 - Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

Carrier Tape No.	B0	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
ZD2000WVS-08CHF	20.3	32	28.4	14.20	36.5	32.5	800	9	7200
ZD2000WVS-09CHF	22.3								
ZD2000WVS-10CHF	24.3								
ZD2000WVS-11CHF	26.3	44	40.4	20.2	48.5	44.5	800	7	5600
ZD2000WVS-12CHF	28.3								
ZD2000WVS-13CHF	30.3								
ZD2000WVS-14CHF	32.3	56	52.4	26.2	60.5	56.5	600	5	3000
ZD2000WVS-15CHF	34.3								

GENERAL TOLERANCE

.X	±0.30
.XX	±0.20
.XXX	±0.10
X°	±0.2°

GYA 东莞市国亚电子有限公司
Connectors Dong Guan Guo Ya Connectors co., ltd.

PART NO.

PPN: 2000WVS-XXC-XXSWXXX-X
CTN: ZD2000WVS-XXCHF

TITLE:

2.00mm Connectors 180° Packing

APPROVAL CHECK DRAWN DATE

Yangzhengguo Yangzhengyi Lviansheng 2016/08/26






UNIT SCALE SHEET REV NUMBER

mm 1:1 1/1 A0 A-000


DATE REV ECN NO. DESCRIPTION MODIFY APPROVAL

1 2 3 4 5 6 7 8

RoHS 包装图

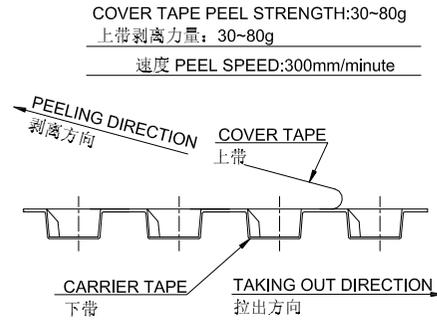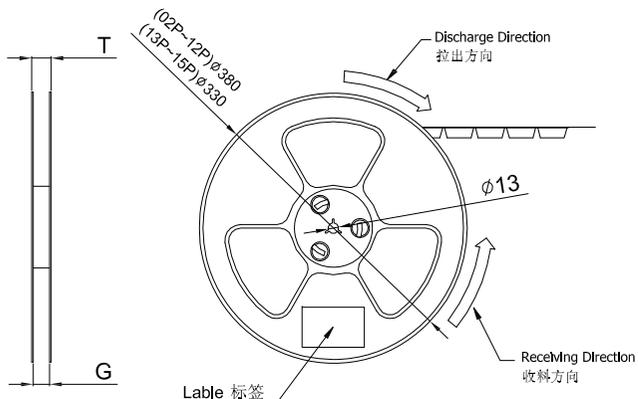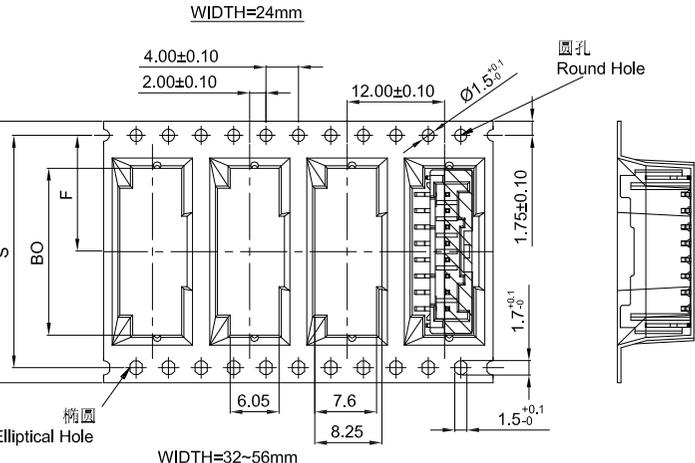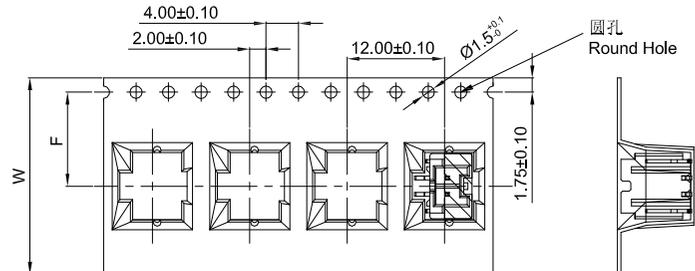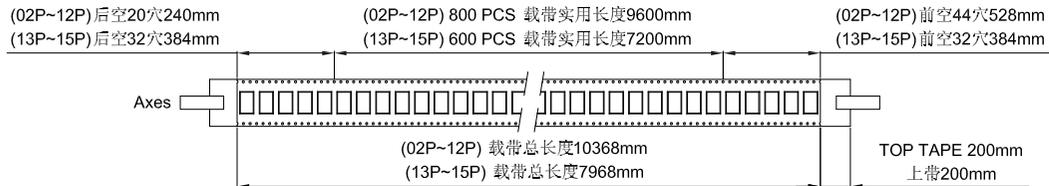

Lable 标签
Single hole: None Hole Side
单孔: 贴无链孔侧
Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧

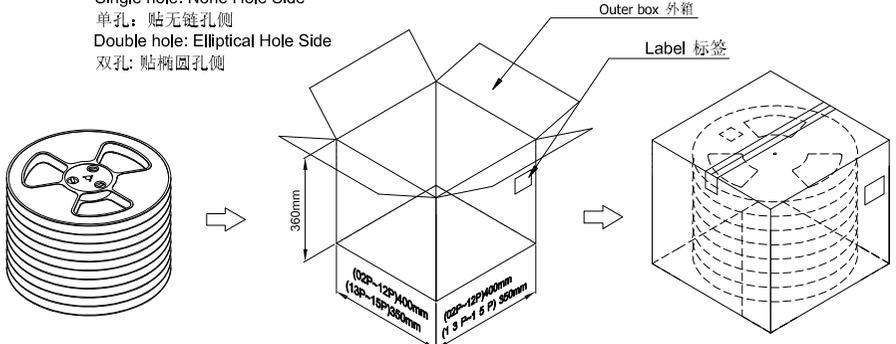

- Note:
- Carrier Camber Is Within 1mm In 100mm; 带长100mm 内容许弯曲度1mm
 - 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM; 圆孔十个孔距离累计允许公差为±0.2mm
 - Material for PS; 材质为PS材质; Color 颜色: Natural 透明色
 - bracer保护带: Color 颜色: Natural 透明色; 厚度0.40mm 最小
 - Thickness=0.50±0.05; 材料厚度为0.50±0.05mm
 - Carton material 纸箱材质: K=K; Carton Thickness 纸箱厚度: 6~7mm

Carrier Tape No. 载带料号	B0	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
ZD2000WVS-02HF	8.3	24	/	11.50	28.5	24.5	800	12	9600
ZD2000WVS-03HF	10.3								
ZD2000WVS-04HF	12.3								
ZD2000WVS-05HF	14.3								
ZD2000WVS-06HF	16.3	32	28.4	14.20	36.5	32.5	800	9	7200
ZD2000WVS-07HF	18.3								
ZD2000WVS-08HF	20.3								
ZD2000WVS-09HF	22.3								
ZD2000WVS-10HF	24.3	44	40.4	20.2	48.5	44.5	800	7	5600
ZD2000WVS-11HF	26.3								
ZD2000WVS-12HF	28.3								
ZD2000WVS-13HF	30.3								
ZD2000WVS-14HF	32.3	56	52.4	26.2	60.5	56.5	600	5	3000
ZD2000WVS-15HF	34.3								

GENERAL TOLERANCE	
.X	±0.30
.XX	±0.20
.XXX	±0.10
X°	±0.2°
视图	

GYA 东莞市国亚电子有限公司
Connectors Dong Guan Guo Ya Connectors co., ltd.





APPROVAL	CHECK	DRAWN	DATE
Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26

PART NO.				
PPN: 2000WVS-XX-XXXXXX-X CTN: ZD2000WVS-XXHF				
TITLE:				
2.00mm Connectors 180° Packing				
UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-000


DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL

RoHS

包装图

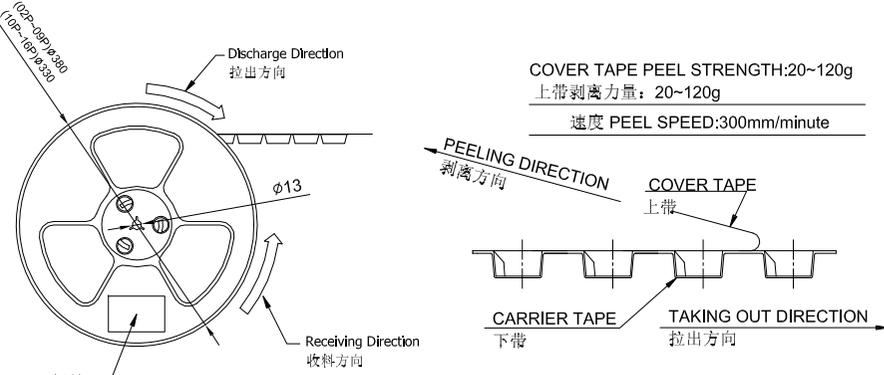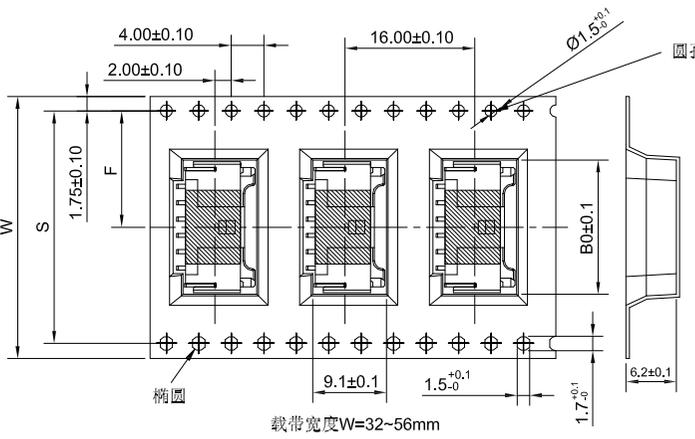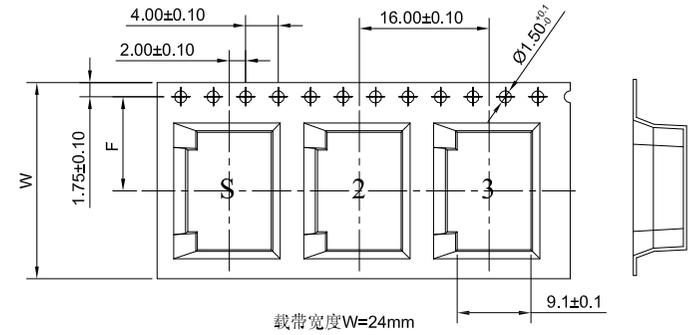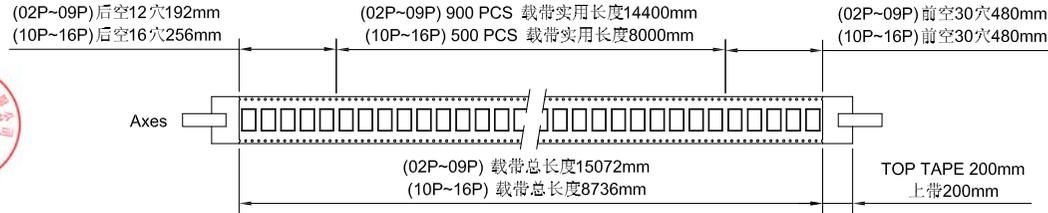

Lable 标签
Single hole: None Hole Side
单孔: 贴无链孔侧
Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧

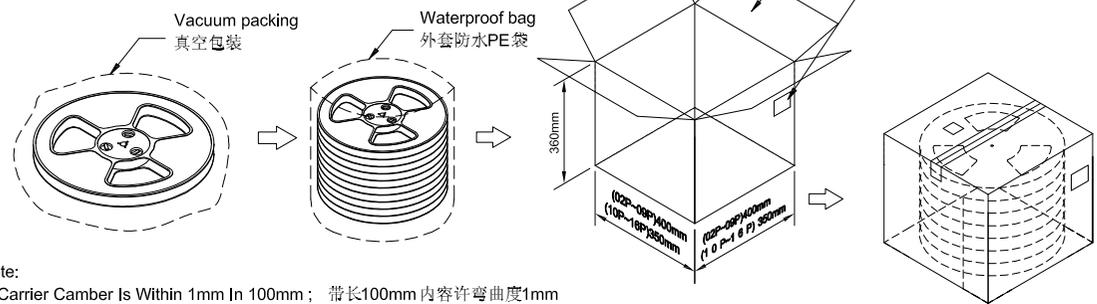

- Note:
- Carrier Camber Is Within 1mm In 100mm ; 带长100mm 内容许弯曲度1mm
 - 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距离累计允许公差为±0.2mm
 - Material for PS ; 材质为PS材质; Color 颜色:Natural本色透明色
 - bracer保护带: Color 颜色:Natural 透明色;厚度0.40mm最小
 - Thickness=0.40±0.05 ; 材料厚度为0.40±0.05mm
 - Cover Tape上带: 冷封
 - Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

Carrier Tape No. 载带料号	W	S	F	T	G	B0	REEL /PCS	CARTON /R	CARTON /PCS
ZD2000WRS-02HF	24	/	11.50	28.5	24.5	8.4	900	12	10800
ZD2000WRS-03HF						10.4			
ZD2000WRS-04HF						12.4			
ZD2000WRS-05HF						14.4			
ZD2000WRS-06HF	32	28.4	14.20	36.5	32.5	16.4	900	9	8100
ZD2000WRS-07HF						18.4			
ZD2000WRS-08HF						20.4			
ZD2000WRS-09HF	44	40.4	20.2	48.5	44.5	22.4	900	7	6300
ZD2000WRS-10HF						24.4			
ZD2000WRS-11HF						26.4			
ZD2000WRS-12HF						28.4			
ZD2000WRS-13HF	56	52.4	26.2	60.5	56.5	30.4	500	5	2500
ZD2000WRS-14HF						32.4			
ZD2000WRS-15HF						34.4			
ZD2000WRS-16HF						36.4			

GENERAL TOLERANCE					PART NO.						
.X	±0.30	东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., ltd.			PPN: 2000WRS-XX-XXXXXX-X CTN: ZD2000WRS-XXHF						
.XX	±0.20				TITLE:						
.XXX	±0.10				APPROVAL	CHECK	DRAWN	DATE	2.00mm Connectors 90° Packing		
X°	±0.2°				Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26	UNIT	SCALE	SHEET
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	mm	1:1	1/1	A0	A-000	