

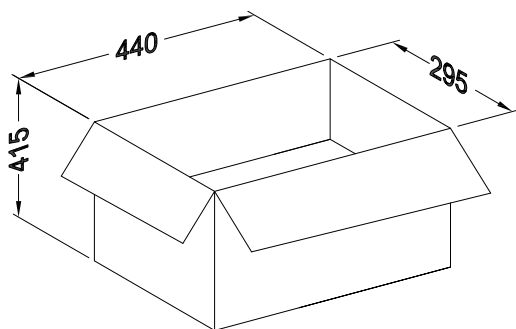




胶带ADHESIVE TAPE

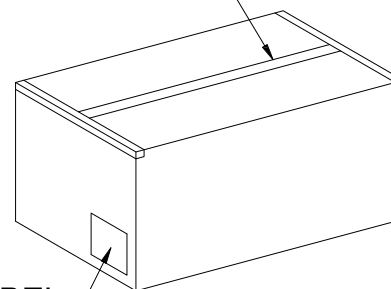

Note注解:

1. Put Housing in a PE bag, PE bag gauge for: 130 * 135 * 0.10 mm, Packing detail see the table below

将 Housing放入PE袋内, PE袋规为:130*135*0.10mm, 详细包装见下表

2. Put PE bag packed products in specifications of 330 * 250 * 300 mm cartons, Packing detail see the table below

将装好产品的PE袋放入规格为330*250*200mm的纸箱内, 详细包装见下表


3. Label depends on customer request, carton opening joint with transparent tape


标签依客户要求而定, 纸箱开口处用透明胶带贴合.

4. Carton material: K=K, Carton thickness: 6~7mm

纸箱材质:K=K, 纸箱厚度:6~7mm

Pin位	袋/PCS	箱/袋	箱/PCS
2*02	1000	50	50K
2*03			
2*04			
2*05			
2*06	1000	35	35K
2*07			
2*08			
2*09			
2*10	1000	20	20K
2*11			
2*12			
2*13			
2*14	1000	14	14K
2*15			
2*16			
2*17			
2*18	1000	14	14K
2*19			
2*20			
2*21			
2*22			

						GENERAL TOLERANCE	GYA Connectors 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., ltd.				PART NO. 2026H-2*XX-N0XX				
						.X ±0.35					TITLE: 2.00mm Housing Packing				
						.XX ±0.25	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
						.XXX ±0.15					mm	1 : 1	1/1	A0	A-022
						X.° ±0.2°									
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	视 角 	Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26					

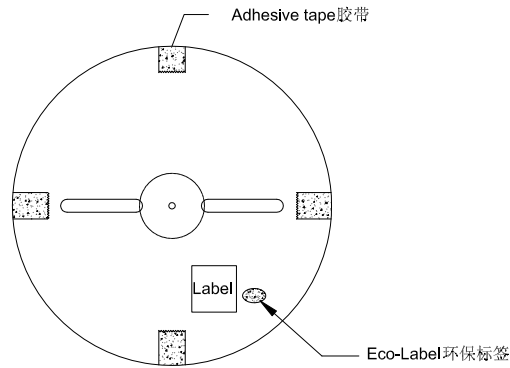

Note 注解:

1.Quantity 数量:

10K PCS/REEL 一卷10K/PCS

10 REEL/BOX 一箱10卷

100K PCS/BOX 一箱100K/PCS

2.Each reel and outer box must be labeled and Eco-Label Respectively labeled

每盘和外箱都必须有标签及环保标签分别标示

3.Terminal winding direction as shown


端子缠绕方向如左图所示

4.There shall be no dirt such as deformation phenomenon, Mantissa box fillers must be used



每箱不可有脏污, 变形现象, 尾数箱必须用填充物

5.Carton material 纸箱材质:K=K;


Carton Thickness 纸箱厚度: 6~7mm

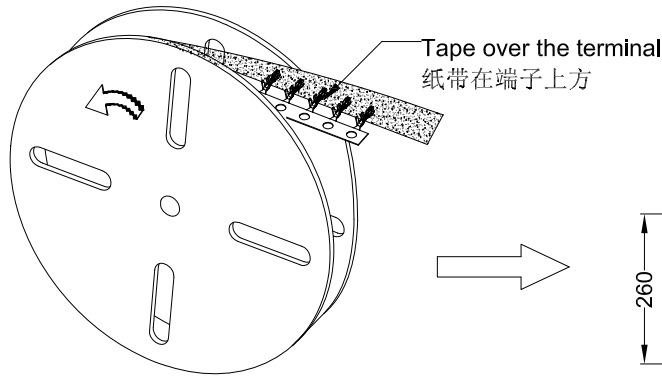


卷装方式
Package way

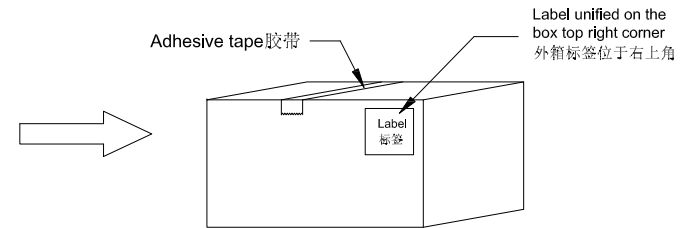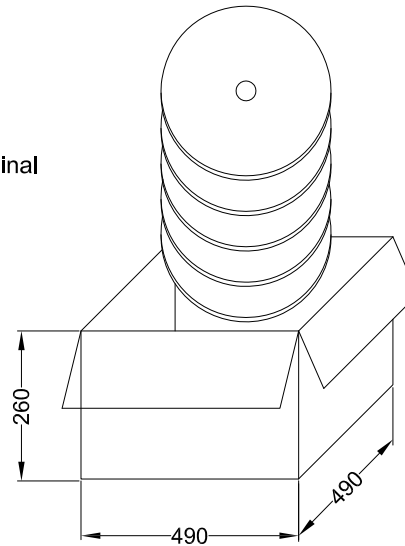


						GENERAL TOLERANCE	GYA Connectors 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., ltd.				PART NO. 2026TX-PXX-X				
						.X ±0.35					TITLE: 2.00mm Terminal Packing				
						.XX ±0.25	APPROVAL								
						.XXX ±0.15						X° ±0.2°			
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	视 角 	Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26	UNIT				
											mm	1:1	1/1	A0	A-000

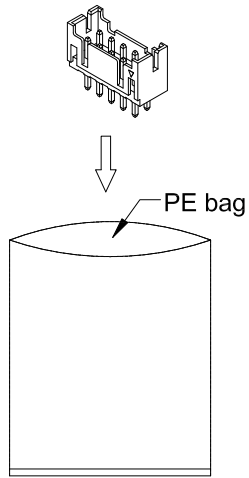


示图一

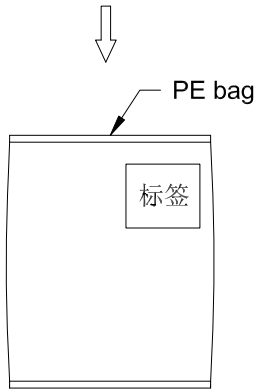

示图三:
1KPCS/袋




示图二: LABEL 1
(最小包装标签)

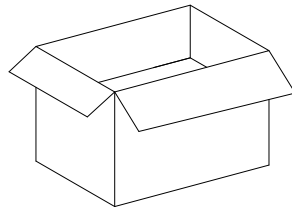

示图四: 整齐装箱

ADHESIVE TAPE
胶带



LABEL 2
(外箱标签)

示图五: 封箱、贴标签及麦头等

包装说明:

- 1、将全检合格之产品, 称重包装每袋1000PCS, 注意不可少数, 并加放1包干燥剂;
- 2、将称重好的每袋产品封口、贴标签, 注意标签字体清晰、数量须准确;
- 3、将袋装产品整齐排列装入对应的纸箱, 不可漏贴标签;
- 4、检查每箱包装数量是否准确, 封箱并贴外箱标签, 注意标签上数量须与实际包装相符;
- 5、尾数箱之包装, 空隙处用填充物塞满, 标签上数量与实际包装数量一致;
- 6、快递送货之包装: 将上述包装好之每箱产品依据实际箱数选择适合的大纸箱, 将每箱整齐装入, 空隙处用填充物塞满并封箱。

纸箱规格:

2*06PIN及以下 (300*225*200)

2*07PIN及以上 (420*270*190)

纸箱材质: K=K 厚度6~7mm





Poles	袋/pcs	箱/袋	箱/pcs
2*02	1000	14	14000
2*03	1000	12	12000
2*04	1000	12	12000
2*05	1000	10	10000
2*06	1000	10	10000
2*07	1000	14	14000
2*08	1000	14	14000
2*09	1000	14	14000
2*10	1000	12	12000
2*11	1000	12	12000
2*12	1000	12	12000
2*13	1000	10	10000
2*14	1000	10	10000
2*15	1000	10	10000
2*16	1000	8	8000
2*17	1000	8	8000
2*18	1000	8	8000
2*19	1000	6	6000
2*20	1000	6	6000

						GENERAL TOLERANCE		GYA 东莞市国亚电子有限公司 Connectors Dong Guan Guo Ya Connectors co., ltd.				PART NO. 2026WV-2*XX-XXXX			
						.X	±0.35					TITLE: 2.00mm WAFER Packing			
						.XX	±0.25	APPROVAL				UNIT	SCALE	SHEET	REV
						.XXX	±0.15	CHECK				mm	1:1	1/1	A0
						X°	±0.2°	DRAWN				NUMBER			
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	Yangzhengguo		Yangzhengyi		Lvtiansheng		2016/08/26			
1															

Note注解:

1. Put Housing in a PE bag, PE bag gauge for: 240 * 245 *0.75 mm, Packing detail see the table below
将 Housing放入PE袋内, PE袋规为:240 * 245 *0.75mm, 详细包装见下表
2. Put PE bag packed products in specifications of 420 * 270 * 190 mm cartons, Packing detail see the table below
将装好产品的PE袋放入规格为420*270*190mm的纸箱内, 详细包装见下表
3. Label depends on customer request, carton opening joint with transparent tape
标签依客户要求而定, 纸箱开口处用透明胶带贴合.
4. Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

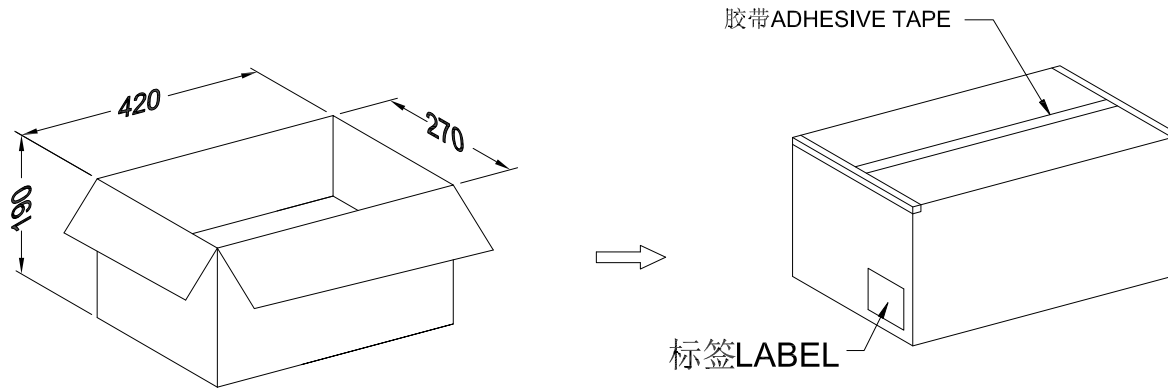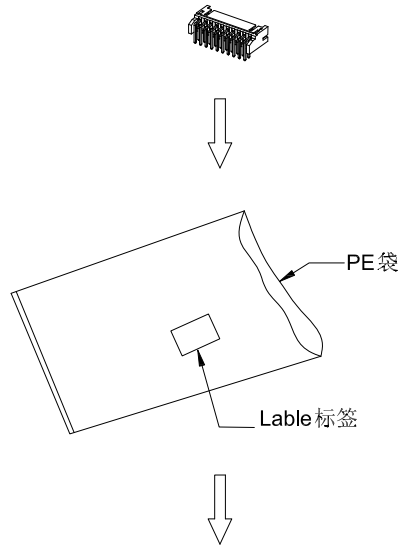

Poles	Bag PCS	CARTON Bag	CARTON PCS
2*02	1000	12	12K
2*03			
2*04			
2*05			
2*06	500	12	6K
2*07			
2*08			
2*09			
2*10	300	12	3.6K
2*11			
2*12			
2*13			
2*14	200	15	3.0K
2*15			
2*16			
2*17			
2*18		14	2.8K
2*19			
2*20			
2*21			
2*22			

						GENERAL TOLERANCE	GYA Connectors 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., Ltd.				PART NO. 2026WR-2*XX-XXXX				
						.X ±0.35					APPROVAL				TITLE:
						.XX ±0.25	CHECK								2.00mm Wafer Packing
						.XXX ±0.15					DRAWN				DATE
						X.° ±0.2°	DATE								UNIT
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	视 角 					Yangzhengguo	Yangzhengyi	Lvtiansheng	2016/08/26	mm