
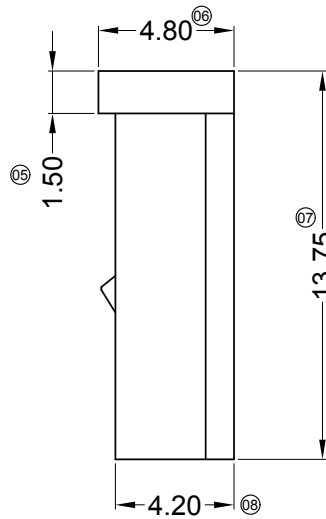
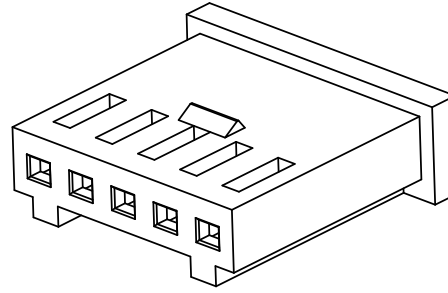
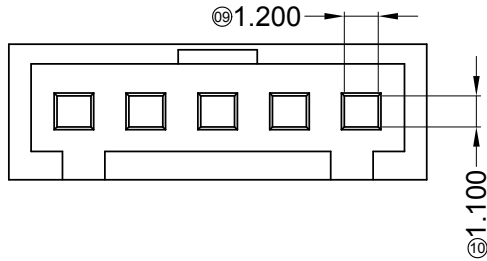
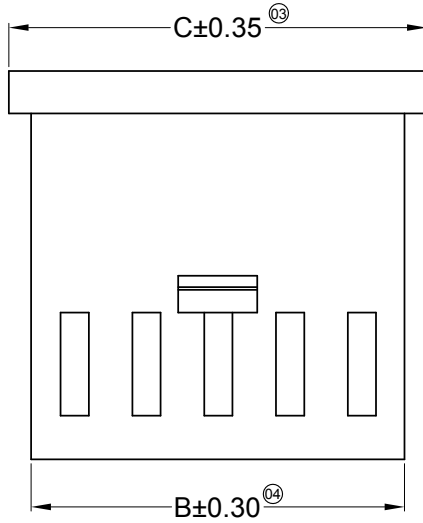


RoHS

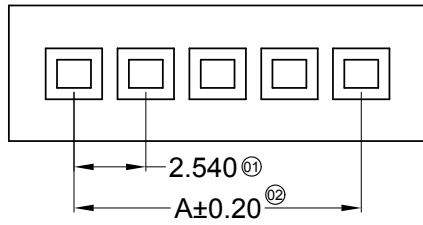

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Suitable GYA Terminal: 2530T Mates
- With GYA Wafer: 2530W

2530 H X-XX X-N0 XX

① ②③④⑤⑥⑦

- ① Series No.
- ② Category: H-HSG
- ③ Connector Type: Blank-ordinary
- ④ Row No.-Pin No Per Row: XX-02~20P
- ⑤ Plug the Pin & special No.: Blank-ordinary
- ⑥ Material: N0-PA66 94V-0
- ⑦ Color: Blank-Natural

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.54	5.60	7.10	13	30.48	33.54	35.04
03	5.08	8.14	9.64	14	33.02	36.08	37.58
04	7.62	10.68	12.18	15	35.56	38.62	40.12
05	10.16	13.22	14.72	16	38.10	41.16	42.66
06	12.70	15.76	17.26	17	40.64	43.70	45.20
07	15.24	18.30	19.80	18	43.18	46.24	47.74
08	17.78	20.84	22.34	19	45.72	48.78	50.28
09	20.32	23.38	24.88	20	48.26	51.32	52.82
10	22.86	25.92	27.42	21	50.80	53.86	55.36
11	25.40	28.46	29.96	22	53.34	56.40	57.90
12	27.94	31.00	32.50				





					GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.° ±2°				东莞市国亚电子有限公司 DONGGUO GUOYA ELECTRONICS CO.,LTD				PART NO. 2530H-XX-N0																
					PROJECT 				APPROVAL YANG				CHECK Jova Lau				DRAWN TIAN				DATE 2007/05/03				TITLE 2.54mm Crimp Style Connectors				
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	UNIT		SCALE		SHEET		REV		NUMBER		mm		1:1		1/1		A0		A-089					

RoHS



■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Suitable GYA Terminal: 2530TM
- Mates With GYA Housing: 2530H-XX

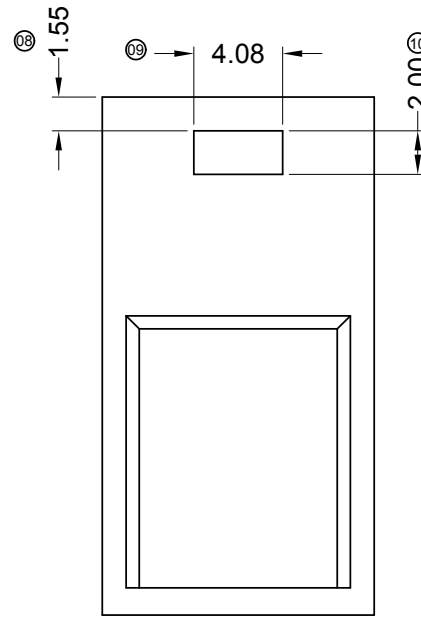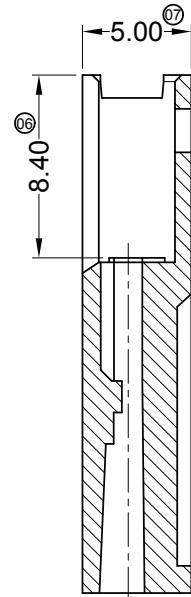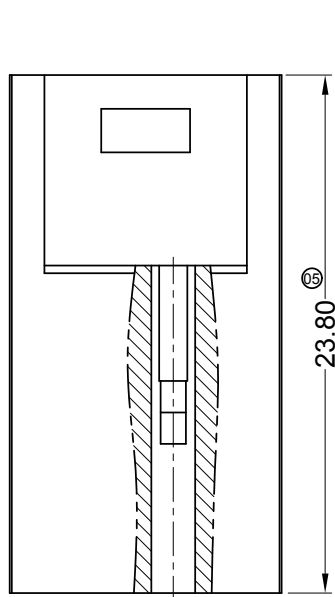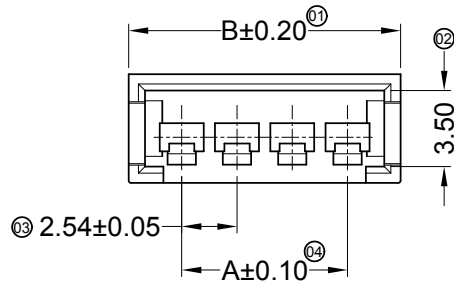

_2530 H F - XX X-PT XX

① ② ③ ④ ⑤ ⑥ ⑦



- ① Series No.
- ② Category: H-HSG
- ③ Connector Type: F-Female HSG
- ④ Row No.-Pin No Per Row: 2*XX-2*02P~2*20P
- ⑤ Plug The Pin & Special No.: Blank-Ordinary
- ⑥ Material: PT-PBT 94V-0
- ⑦ Color: Blank-Natural

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2	2.54	7.42	12	27.94	32.82
3	5.08	9.96	13	30.48	35.36
4	7.62	12.50	14	33.02	37.90
5	10.16	15.04	15	35.56	40.44
6	12.70	17.58	16	38.10	42.98
7	15.24	20.12	17	40.64	45.52
8	17.78	22.66	18	43.18	48.06
9	20.32	25.20	19	45.72	50.06
10	22.86	27.74	20	48.26	53.14
11	25.40	30.28			

					GENERAL TOLERANCE		东莞市国亚电子有限公司 DONGGUO GUOYA ELECTRONICS CO.,LTD				PART NO. 2530HF-XX-PT					
					.X ±0.30						TITLE 2.54 mm Crimp Style Connectors					
					.XX ±0.20		APPROVAL		CHECK	DRAWN						DATE
					.XXX ±0.10		YANG		Jova Lau	TIAN	2016/06/24	SCALE	SHEET	REV	NUMBER	
					X.° ±2°		PROJECT					mm	1 : 1	1/1	A0	A-106
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT										

1 2 3 4 5 6 7 8

RoHS

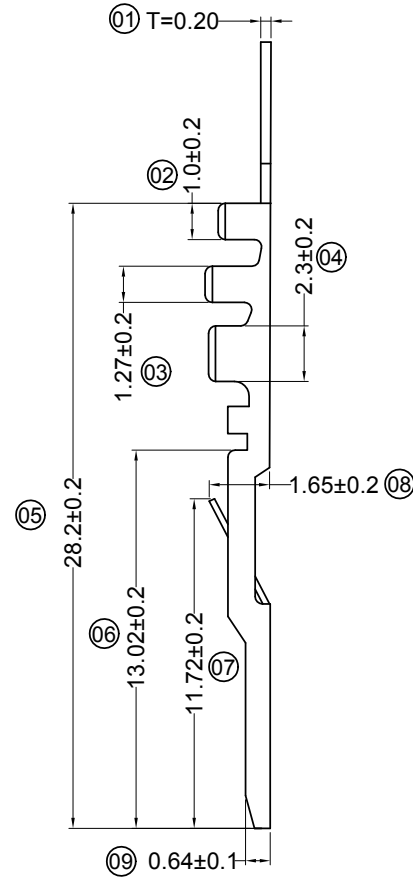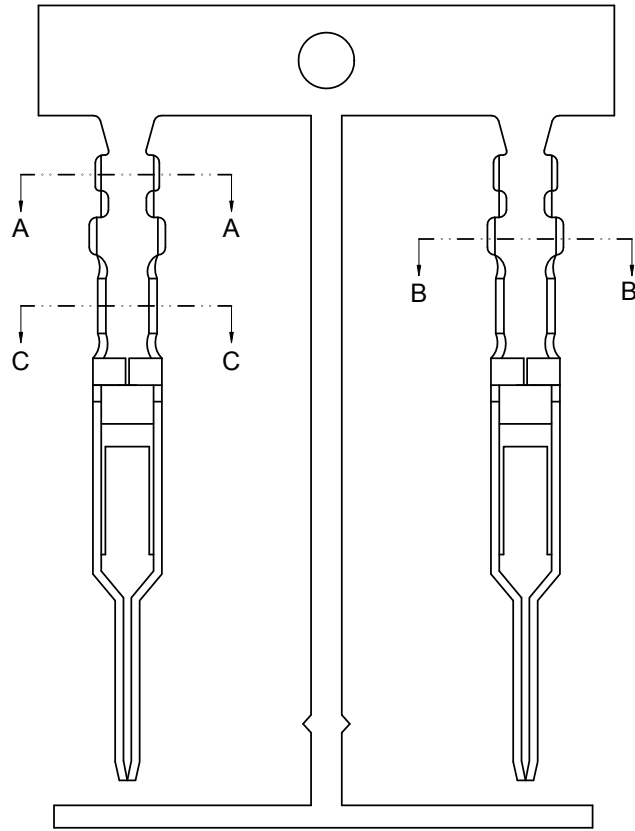


Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

- Wire Size: AWG #22~26
- Insulation O.D.: 1.55mm (Max)
- Used In GYA Housing: 2530H

2530 T M-X SN X-X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series Number
- ② Category: T-Terminal
- ③ Shape: M-Male
- ④ Material: P-Phosphor Bronze B-Brass
- ⑤ Plating Code: SN-Ni 30u" Min Bright tin 70u" Min
- ⑥ Plating Method: B-Plating Before Stamping
- ⑦ Mold No./Mark/Special No. : Blank-Ordinary

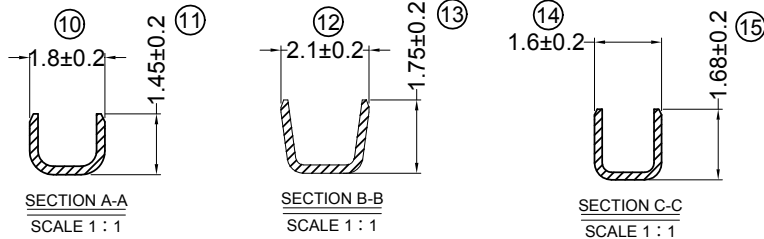

					GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.° ±2°				东莞市国亚电子有限公司 DONGGUO GUOYA ELECTRONICS CO.,LTD				PART NO. 2530TM-XSN							
					APPROVAL YANG				CHECK Sun Kaibao		DRAWN TIAN		DATE 2007/05/03			TITLE 2.54 mm Crimp Style Connectors				
					PROJECT 											UNIT mm				
																SCALE 1 : 1				
																SHEET 1/1				
																REV A0				
																NUMBER A-093				

DATE

REV

ECN NO.

DESCRIPTION

MODIFY

APPROVAL



APPROVAL

CHECK

DRAWN

DATE

UNIT



SCALE

SHEET

REV

NUMBER

RoHS

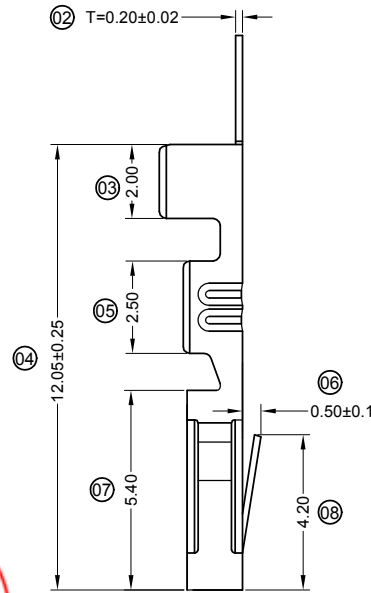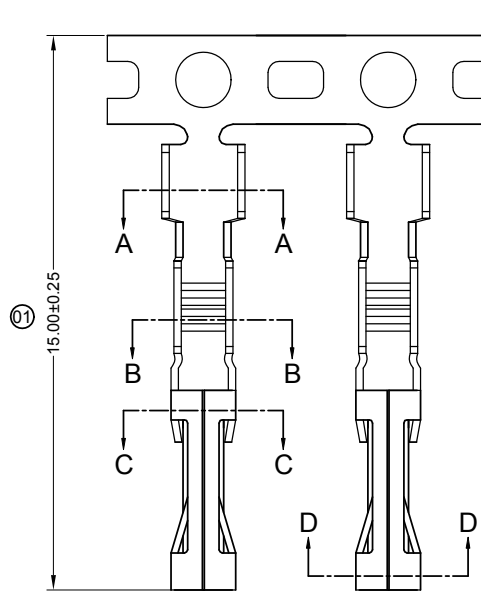


■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ


- Wire Size: AWG #22~26
- Insulation O.D.: 1.55mm (Max)
- Used In GYA Housing: 2530H

2530 T F-P SN X-A
① ② ③ ④ ⑤ ⑥ ⑦


- ① Series Number
- ② Category: T-Terminal
- ③ Shape: F-Fmale
- ④ Material: P-Phosphor Bronze
- ⑤ Plating Code: SN-Ni 30u" Min Bright tin 70u" Min
- ⑥ Plating Method: B-Plating Before Stamping
- ⑦ Mold No./Mark/Special No. : A-Single Strip




SECTION A-A
SCALE 1 : 1



SECTION B-B
SCALE 1 : 1



SECTION C-C
SCALE 1 : 1





SECTION D-D
SCALE 1 : 1



					GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.° ±2°				东莞市国亚电子有限公司 DONGGUO GUOYA ELECTRONICS CO.,LTD				PART NO. 2530TF-PSN-A							
					APPROVAL YANG				CHECK ZHONG		DRAWN TIAN		DATE 2007/05/03			TITLE 2.54 mm Crimp Style Connectors				
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT							UNIT	SCALE	SHEET	REV	NUMBER			
													mm	1:1	1/1	A0	A-053			

RoHS

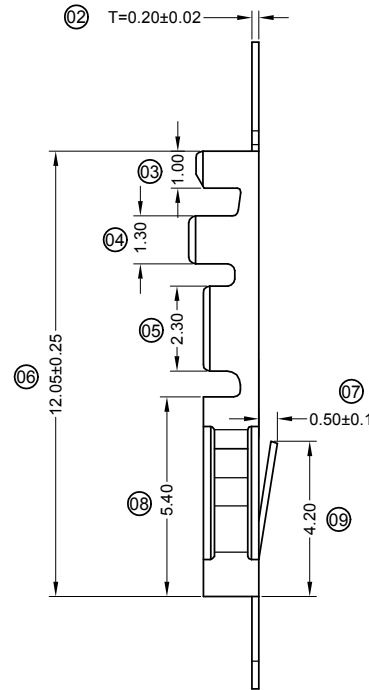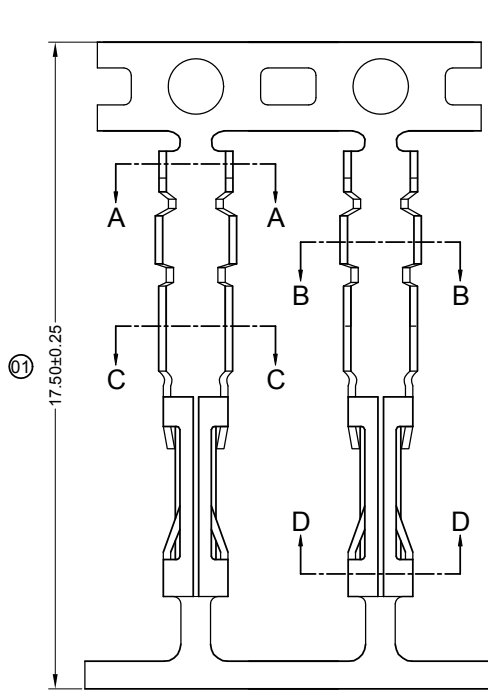


■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ


- Wire Size: AWG #22~26
- Insulation O.D.: 1.55mm (Max)
- Used In GYA Housing: 2530H

2530 T F-P SN X-X
 ① ② ③ ④ ⑤ ⑥ ⑦


- ① Series Number
- ② Category: T-Terminal
- ③ Shape: F-Fmale
- ④ Material: P-Phosphor Bronze
- ⑤ Plating Code: SN-Ni 30u" Min Bright tin 70u" Min
G10- Contact Area Gold 10u"Au
- ⑥ Plating Method: B-Plating Before Stamping
- ⑦ Mold No./Mark/Special No. : Blank-Ordinary




SECTION A-A
SCALE 1 : 1



SECTION B-B
SCALE 1 : 1







SECTION C-C
SCALE 1 : 1



SECTION D-D
SCALE 1 : 1

					GENERAL TOLERANCE		东莞市国亚电子有限公司 DONGGUO GUOYA ELECTRONICS CO.,LTD		PART NO. 2530TF-PXXX							
					.X ±0.30				TITLE 2.54 mm Crimp Style Connectors							
					.XX ±0.20		APPROVAL		CHECK	DRAWN	DATE					
					.XXX ±0.10		YANG		ZHONG	TIAN	2007/05/03	UNIT	SCALE	SHEET	REV	NUMBER
					X.° ±2°		PROJECT					mm	1 : 1	1/1	A0	A-053
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT										

RoHS

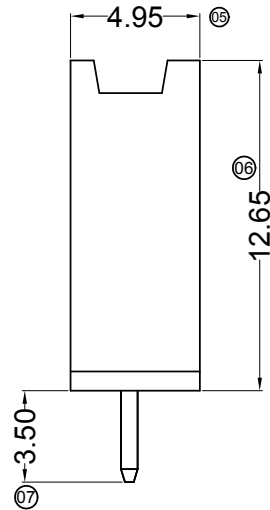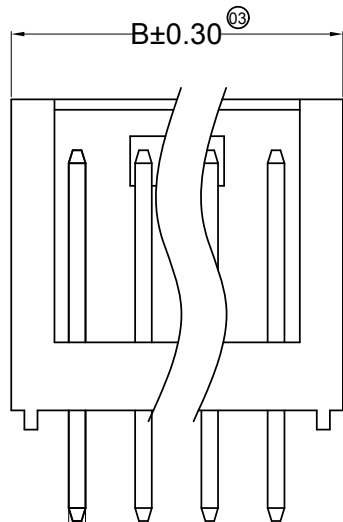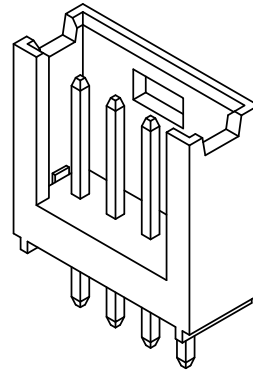

■ Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Material(Pin): Brass
- Mates With GYA Housing: 2530H

2530 W V XX- XX X-PTSN XX

① ②③④ ⑤ ⑥⑦⑧ ⑨

- ① Series No.
- ② Category: W-Wafer
- ③ Connector Type: V-Stright 180°
- ④ Mouting Type: Blank-DIP
- ⑤ Row No.-Pin No Per Row: XX-02~22P
- ⑥ Special No.: Blank-Ordinary
- ⑦ Material: PT-PBT 94V-0
- ⑧ Plating Code: SN-Bright Tin
- ⑨ Color: Blank-Black ; RE-Red ; WH-White

④ SQ 0.64








Recommended P.C.B Layout
General Tolerance±0.05

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.54	7.70	13	30.48	35.60
03	5.08	10.20	14	33.02	38.10
04	7.62	12.70	15	35.56	40.70
05	10.16	15.20	16	38.10	43.20
06	12.70	17.80	17	40.64	45.70
07	15.24	20.30	18	43.18	48.20
08	17.78	22.90	19	45.72	50.70
09	20.32	25.40	20	48.26	53.20
10	22.86	28.00	22	53.34	58.50
11	25.40	30.50			
12	27.94	33.10			

					GENERAL TOLERANCE		东莞市国亚电子有限公司 DONGGUO GUOYA ELECTRONICS CO.,LTD				PART NO. 2530WV-XX-PTSNXX					
					.X ±0.30						TITLE 2.54mm Crimp Style Connectors					
					.XX ±0.20		APPROVAL		CHECK	DRAWN						DATE
					.XXX ±0.10		YANG		ZHONG	TIAN	2017/03/17	mm	1 : 1	1 : 1	A0	A-000
					X.° ±2°		PROJECT									
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL											

RoHS

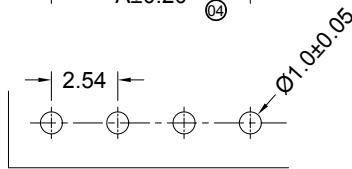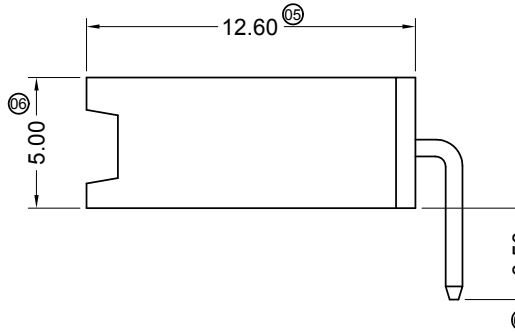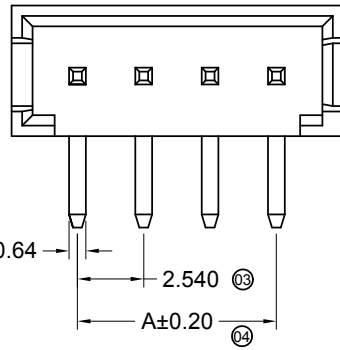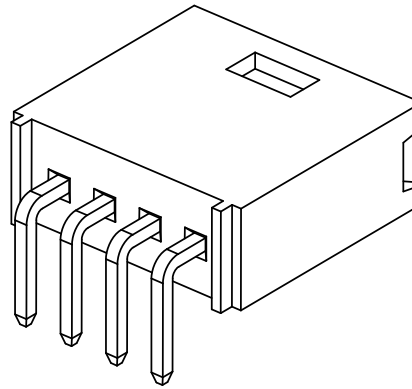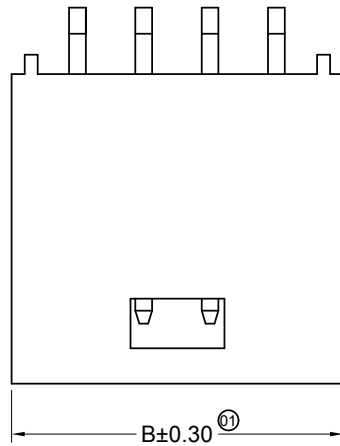

Recommended P.C.B Layout
General Tolerance±0.05

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Material(Pin): Brass
- Mates With GYA Housing: 2530H

2530 W R XX- XX X-PTSN XX
① ②③④ ⑤ ⑥⑦⑧ ⑨

- ① Series No.
- ② Category: W-Wafer
- ③ Connector Type: R-Right Angle 90°
- ④ Mounting Type: Blank-DIP
- ⑤ Row No.-Pin No Per Row: XX-02~22P
- ⑥ Special No.: Blank-Ordinary
- ⑦ Material: PT-PBT 94V-0
- ⑧ Plating Code: SN-Bright Tin
- ⑨ Color: Blank-Black ; RE-Red ; WH-White

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.54	7.70	12	27.94	33.10
03	5.08	10.20	13	30.48	35.60
04	7.62	12.70	14	33.02	38.10
05	10.16	15.20	15	35.56	40.70
06	12.70	17.80	16	38.10	43.20
07	15.24	20.30	17	40.64	45.70
08	17.78	22.90	18	43.18	48.20
09	20.32	25.40	19	45.72	50.70
10	22.86	28.00	20	48.26	53.20
11	25.40	30.50	22	53.34	58.50



					GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.° ±2°		东莞市国亚电子有限公司 DONGGUO GUOYA ELECTRONICS CO.,LTD				PART NO. 2530WR-XX-PTSXXX				
					PROJECT		APPROVAL	CHECK	DRAWN	DATE	TITLE 2.54mm Crimp Style Connectors				
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	YANG	ZHONG	TIAN	2007/05/03	UNIT	SCALE	SHEET	REV	NUMBER	
1										mm	1:1	1/1	A0	A-089	