


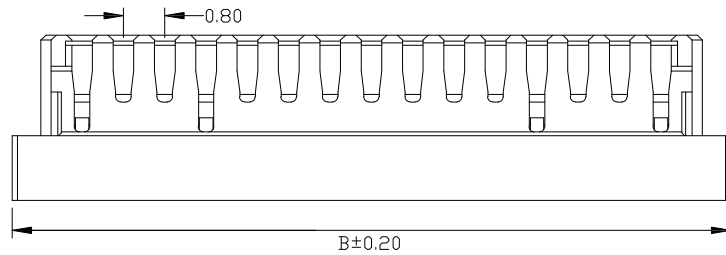



RoHS

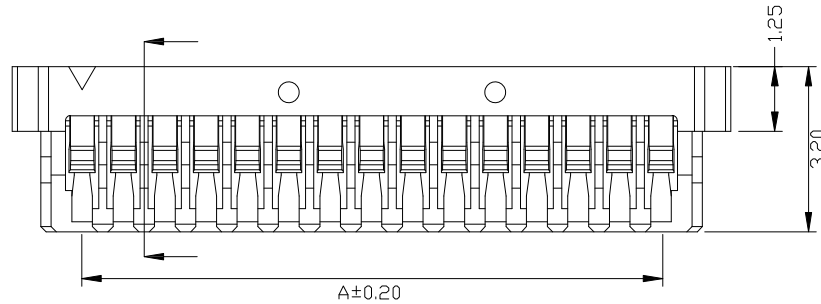

这个插线的孔的长度和宽度

■ Specifications(规格):

- Voltage rating(额定电压): 30V AC / DC
- Current rating(额定电流): 0.5A AC / DC
- Withstanding voltage(耐压值): 200V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥100MΩ
- Contact resistance(接触电阻): ≤20mΩ
- After environmental testing(环境测试后): ≤30mΩ

A0809 H X-XX X-9T XX
① ② ③ ④ ⑤ ⑥ ⑦

- ① 系列
- ② 类别: H-HSG
- ③ 外观形态: 空码-普通
PIN数或防呆KEY形态:
- ④ 单排-XX
- ⑤ 特殊码: 空
- ⑥ 材质: 9T-PA9T UL94V-0
- ⑦ 颜色:
空码-本色或普通色 HF-无卤





Poles	Dimensions (mm)	
	A	B
02	0.80	3.50
03	1.60	4.30
04	2.40	5.10
05	3.20	5.90
06	4.00	6.70
08	5.60	8.30
10	7.20	9.90
12	8.80	11.50
14	10.40	13.10
15	11.20	13.90
16	12.00	14.70
17	12.80	15.50
20	15.20	17.90

A0809H-XX-9TN0	PA9T UL 94V-0	A0809T	A0809WRS	1,000Pcs
PART NO	Material	Suitable GYA Terminal	Mates With GYA Wafer	Q' ty/Bag

						GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1				GYA Connectors 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., Ltd.				料号 PART NO A0809H-XX-9TN0			
						APPROVAL Yangzhengguo CHECK Yangzhengyi DRAWN Lviansheng DATA 2018/10/25				品名 TITLE 0.80mm Crimp Style connectors							
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	UNIT	SCALE	NUMBER	REV						
								MM	1:1	A-027	A0						

HF/ROHS

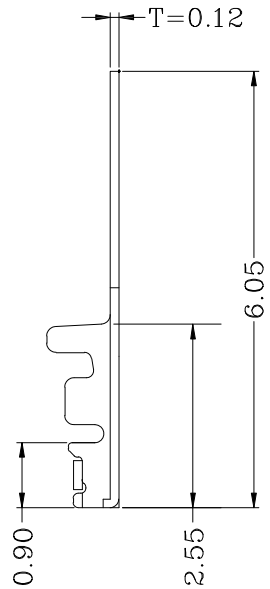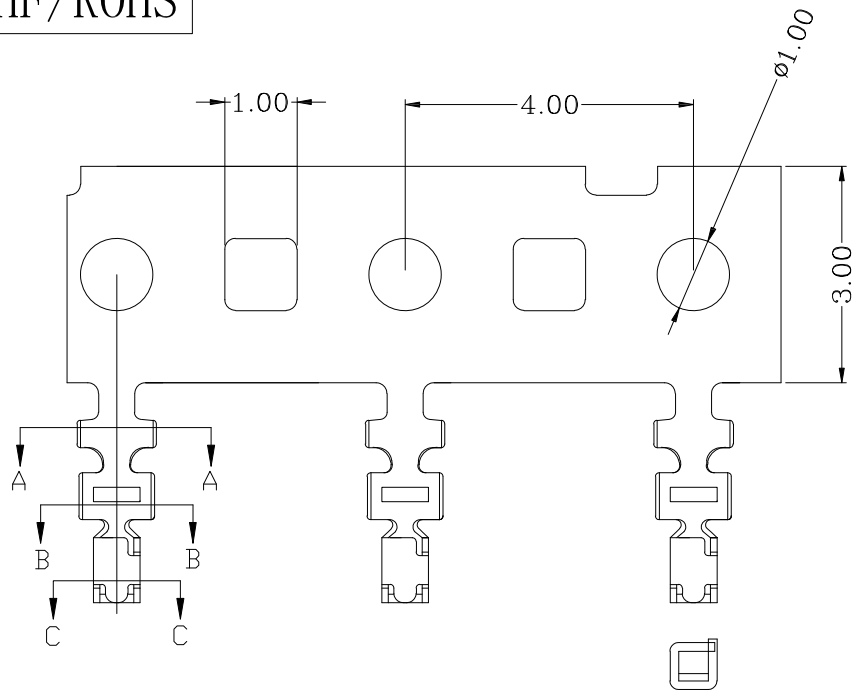


■ Specifications(规格):

- Voltage rating(额定电压): 30V AC / DC
- Current rating(额定电流): 1.0A AC / DC
- Withstanding voltage(耐压值): 200V AC/minute
- Temperature range(工作温度): $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- Insulation resistance(绝缘电阻): $\geq 100\text{M}\Omega$
- Contact resistance(接触电阻): $\leq 20\text{m}\Omega$
- After environmental testing(环境测试后): $\leq 30\text{m}\Omega$


A0809 T X-P XX X-X

- ① ② ③ ④ ⑤ ⑥ ⑦


- ①系列
- ②类别: T-端子
- ③外观形态:
- ④空码-普通脚
材质: P-磷铜
- ⑤电镀类别: SN-镀亮锡(70-120U")
- ⑥电镀方式: 空码-先冲后镀
- ⑦模号/MARK及特殊码




SECTION A-A



SECTION B-B



SECTION C-C

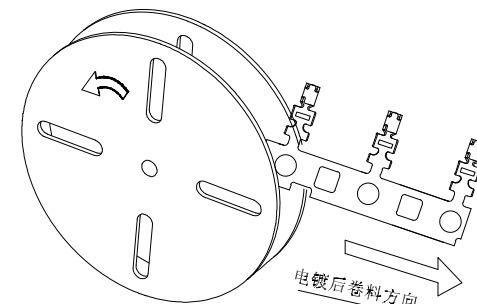

电镀后卷装图

A0809T-PSN	Phosphor Bronze	AWG#28-32	0.60mm(Max)	Stamping Before Plating:30~50u" Ni;70~100u"Sn	A0809H	30KPCS
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In GYA Housing	Q' ty/Rell

				GENERAL TOLERANCE				料号 PART NO							
				. X ± 0.3				A0809T-PXX							
				. XX ± 0.2				品名 TITLE							
				. XXX ± 0.1				0.80mm Crimp Style connectors							
				PROJECT				UNIT							
DATE	OLD	NEW	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	Yangzhengguo	Yangzhengyi	Lviansheng	2018/07/08	MM	SCALE	NUMBER	REV
1			2				PROJECT	Yangzhengguo	Yangzhengyi	Lviansheng	2018/07/08	MM	1/1	A-088	A



东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL CHECK DRAWN DATA

UNIT MM SCALE 1/1 NUMBER A-088 REV A

