



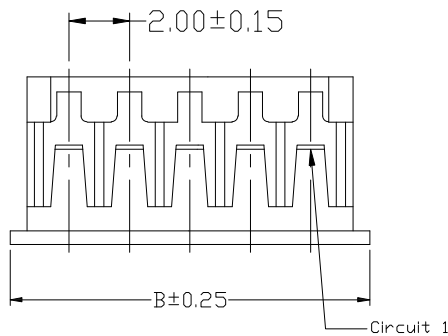




RoHS

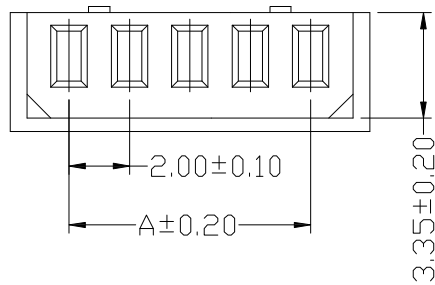

2PIN



3PIN

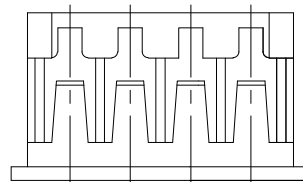

4PIN

■ Specifications(规格):

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 2A AC / DC
- Withstanding voltage(耐压值): 1000V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ
- After environmental testing(环境测试后): ≤30mΩ

A2003 H X-XX X-N0 XX

① ② ③ ④ ⑤ ⑥ ⑦

- ① 系列
- ② 类别:
H-HSG
- ③ 外观形态:
空码-普通
- ④ P I N 数或防呆KEY形态:
单排-XX
- ⑤ 塞P I N 及特殊码
- ⑥ 材质:
NO-PA66 94V-0
- ⑦ 颜色:
空码-本色或普通色

Poles	Dimensions (mm)	
	A	B
2	2.00	6.20
3	4.00	8.20
4	6.00	10.20
5	8.00	12.20
6	10.00	14.20
7	12.00	16.20
8	14.00	18.20
9	16.00	20.20
10	18.00	22.20
11	20.00	24.20
12	22.00	26.20
13	24.00	28.20
14	26.00	30.20
15	28.00	32.20

A2003H-XX-N0	Nylon 66 UL 94V-0	A2003T	A2003W	1,000Pcs
PART NO	Material	Suitable GYA Terminal	Mates With GYA Wafer	Q' ty/Bag



GENERAL TOLERANCE	
.X	±0.30
.XX	±0.20
.XXX	±0.10
X.°	±2°






东莞市国亚电子有限公司
Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL	CHECK	DRAWN	DATE
Yangzhengguo	Yangjinyi	Lvtiansheng	2016/08/26


PART NO. A2003H-XX-N0				
TITLE 2.00mm Crimp Style Connectors				
UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/3	A0	A-000

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT
1						


RoHS

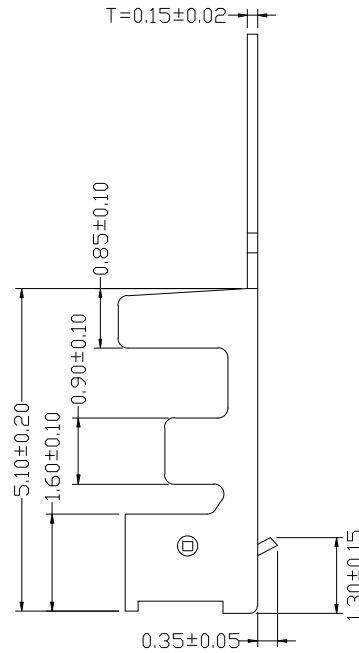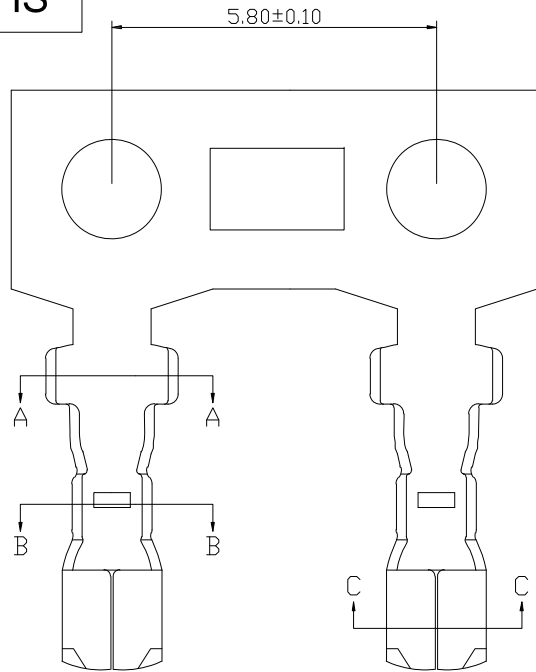

Section: A-A



Section: B-B



Section: C-C

■ Specifications(规格):

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 2A AC / DC
- Withstanding voltage(耐压值): 1000V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ
- After environmental testing(环境测试后): ≤30mΩ

A2003 T X-P SN X-X

① ② ③ ④ ⑤ ⑥ ⑦

- ① 系列
- ② 类别:
T - 端子
- ③ 外观形态:
空码-普通脚
- ④ 材质:
P - 磷铜
- ⑤ 电镀类别: G * * - 镀金 V * * - 镀全金
*01-1U" *02-2U" *03-3U" *05-5U"
*10-10U" *15-15U" *30-30U" *50-50U"
SN - 镀亮锡(70-120U") SN1 - 镀亮锡(120U")
- ⑥ 电镀方式:
空码-先冲后镀 B - 先镀后冲
- ⑦ 模号/ MARK 及特殊码



A2003T-PSNB	Phosphor Bronze	AWG#24-30	1.40mm(Max)	Plating Before Stamping:10~30u" Ni;40~60u"Sn	A2003H	10,000Pcs
A2003T-PSN				Stamping Before Plating:30~50u" Ni;70~120u"Sn		
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In GYA Housing	Q' ty/Reel

					<p>GENERAL TOLERANCE</p> <p>.X ±0.30</p> <p>.XX ±0.20</p> <p>.XXX ±0.10</p> <p>X." ±2°</p>				<p>GYA 东莞市国亚电子有限公司 Connectors Dong Guan Guo Ya Connectors co., Ltd.</p>				<p>PART NO. A2003T-PSNX</p>			
					<p>APPROVAL CHECK DRAWN DATE</p>				<p>TITLE 2.00mm Crimp Style Connectors</p>							
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT	Yangzhengguo	Yangjinyi	Lvtiansheng	2016/08/26	UNIT	SCALE	SHEET	REV	NUMBER	
1	2	3	4	5	6	7	8	9	10	11	mm	1:1	1/3	A0	A-000	