



RoHS

包装图

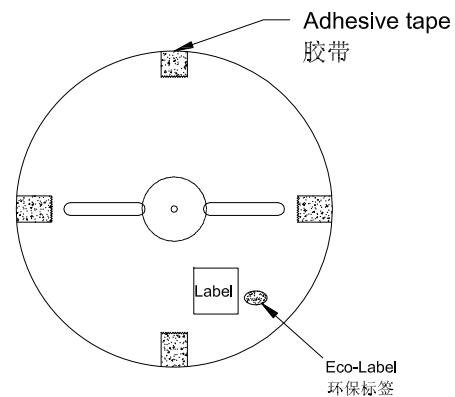


Note 注解:

- Quantity 数量:
10K PCS/REEL 一卷10K/PCS
10 REEL/BOX 一箱10卷
100K PCS/BOX 一箱100K/PCS
- Each reel and outer box must be labeled and Eco-Label Respectively labeled
每盘和外箱都必须有标签及环保标签分别标示
- Terminal winding direction as shown
端子缠绕方向如左图所示
- There shall be no dirt such as deformation phenomenon, Mantissa box fillers must be used
每箱不可有脏污,变形现象,尾数箱必须用填充物
- Carton material: K=K, Carton thickness: 6±1mm
纸箱材质:K=K, 纸箱厚度:6±1mm
- Paper tape should be white
纸带需用白色
- One waterproof bag and two bags of desiccant 10g should be put in each box.
每箱里面要放一个防水袋和两包干燥剂10g
- Storage conditions: Temperature 10~30 °C; Humidity 20%~65%RH
存储条件: 温度10~30 °C; 湿度20%~65%RH

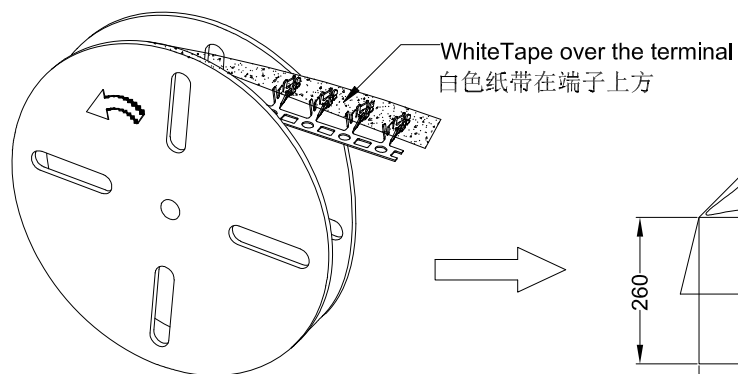

卷装方式
Package way

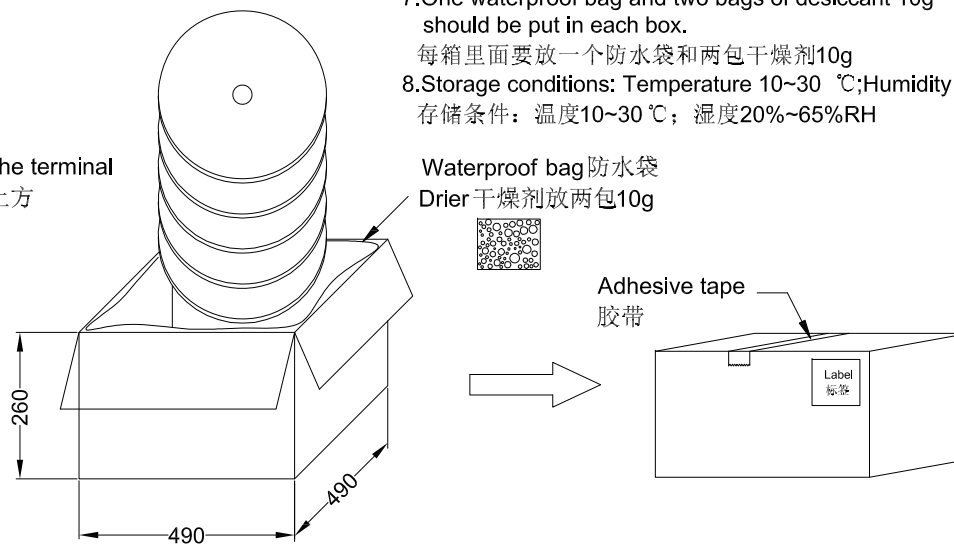

					GENERAL TOLERANCE .X ±0.35 .XX ±0.25 .XXX ±0.15 X° ±0.2° 视 角		GYA Connectors 东莞市国亚电子有限公司 Dong Guan Guo Ya Connectors co., Ltd.		PART NO. A2007T-XXX	
					APPROVAL Yangzhengguo		CHECK Yangjinyi		DRAWN Lvtiansheng	
					DATE 2016/08/26		TITLE: 2.00mm Terminal Packing		UNIT mm	
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	SCALE	SHEET	REV	NUMBER	
1						1:1	1/1	A0	A-014	