






RoHS

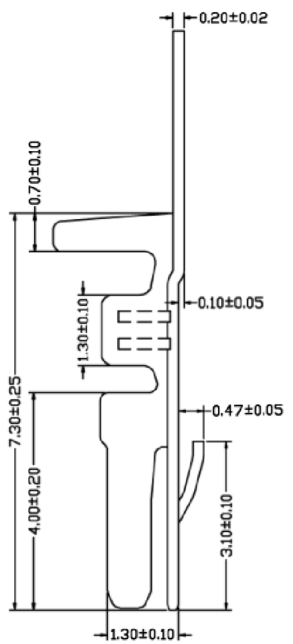

SPECIFICATIONS
 Current rating: 3A AC, DC
 Voltage rating: 250V AC, DC
 Temperature range: -25° C ~ +85° C
 Contact resistance: 30mΩ Max.
 Insulation resistance: 1000MΩ Min.
 Withstanding voltage: 1000V AC/minute
 Mates with A2007H series Housing

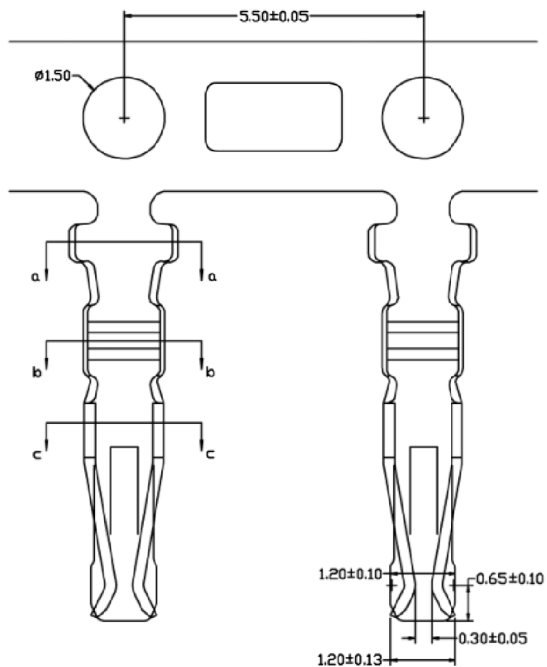

GENERAL TOLERANCE	
.X	±0.30
.XX	±0.20
.XXX	±0.10
X.°	±2°
PROJECT	

GYA 东莞市国亚电子有限公司
 Connectors Dong Guan Guo Ya Connectors co., Ltd.

APPROVAL	CHECK	DRAWN	DATE
Yangzhengguo	Yangjinyi	Lvtiansheng	2016/08/26

PART NO. A2007T-XXX				
TITLE 2.00mm Crimp Style Connectors				
UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-022



DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL
1					

RoHS

Reference Informations:
 *Material: Nylon 66,UL94V-0
 *Suitable series Terminal
 *Mates with series Wafer

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
A2007H-2*3P	4.00	6.60	5.00
A2007H-2*4P	6.00	8.60	
A2007H-2*5P	8.00	10.60	
A2007H-2*6P	10.00	12.60	5.50
A2007H-2*7P	12.00	14.60	
A2007H-2*8P	14.00	16.60	11.50
A2007H-2*9P	16.00	18.60	
A2007H-2*10P	18.00	20.60	
A2007H-2*11P	20.00	22.60	
A2007H-2*12P	22.00	24.60	
A2007H-2*13P	24.00	26.60	15.60
A2007H-2*14P	26.00	28.60	
A2007H-2*15P	28.00	30.60	
A2007H-2*16P	30.00	32.60	
A2007H-2*17P	32.00	34.60	
A2007H-2*18P	34.00	36.60	
A2007H-2*19P	36.00	38.60	
A2007H-2*20P	38.00	40.60	

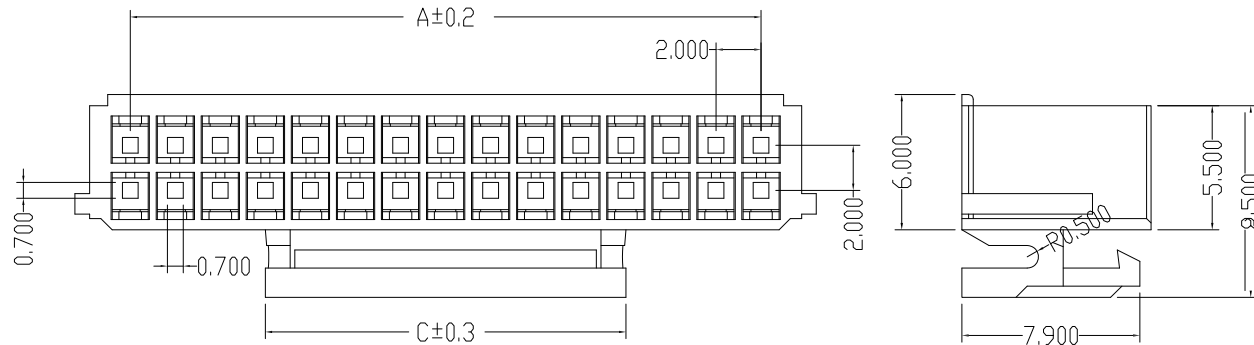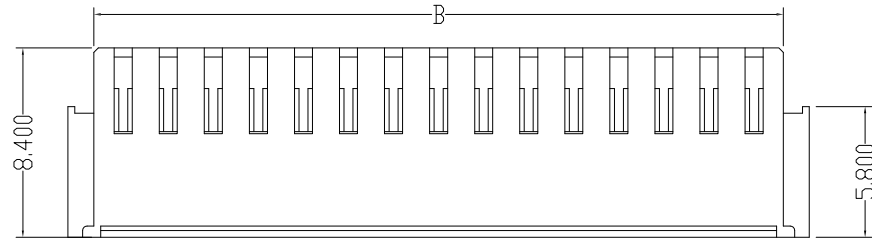

GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10
X.° ±2°



东莞市国亚电子有限公司
 Dong Guan Guo Ya Connectors co., Ltd.

PART NO.
 A2007H-2*XXX

TITLE
 2.00mm Crimp Style Connectors

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL
1					
2					
3					
4					





PROJECT

APPROVAL	CHECK	DRAWN	DATE
Yangzhengguo	Yangjinyi	Lvtiansheng	2016/08/26

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-022

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

RoHS

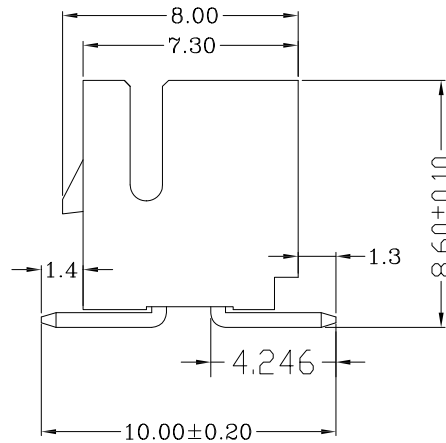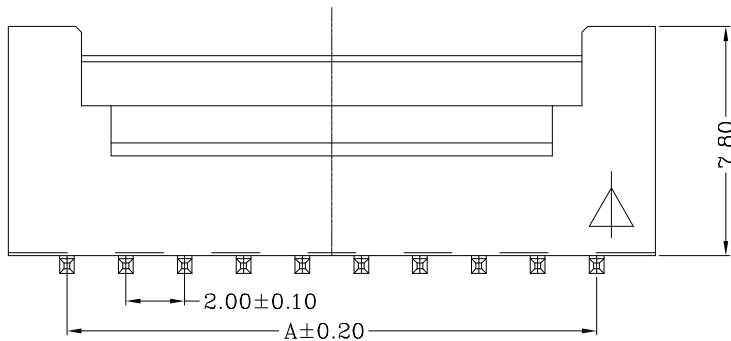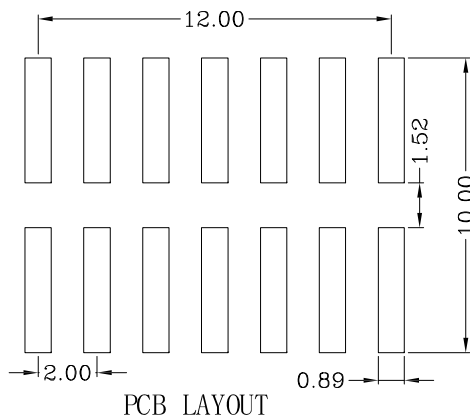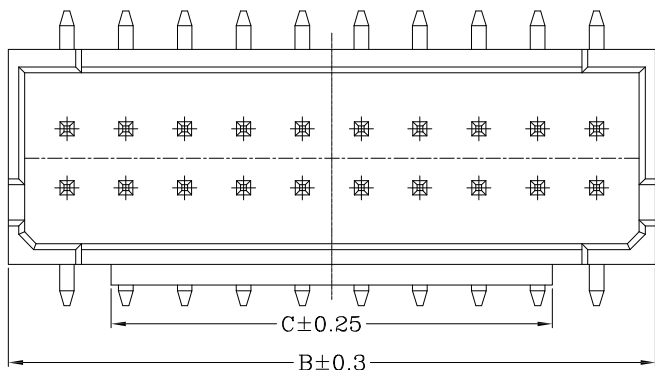

SPECIFICATIONS

Current rating:3A AC,DC
 Voltage rating:250V AC,DC
 Temperature range:-25° C~+85° C
 Contact resistance:30mΩ Max.
 Insulation resistance:1000MΩ Min.
 Withstanding voltage:1000V AC/minute
 Mates with A2007H series Housing

A2007WVS-2XNP

- ① Material:
0=Nylon66 UL94V-0;
- ② Color code:
NA=Natural
- ③ Pin information:
TB=Brass plating tin
- ④ Client code



Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
A2007wvs-2X02P	2.00	6.00	3.00
A2007wvs-2X03P	4.00	8.00	3.00
A2007wvs-2X04P	6.00	10.00	3.00
A2007wvs-2X05P	8.00	12.00	5.00
A2007wvs-2X06P	10.00	14.00	7.00
A2007wvs-2X07P	12.00	16.00	9.00
A2007wvs-2X08P	14.00	18.00	11.00
A2007wvs-2X09P	16.00	20.00	13.00
A2007wvs-2X10P	18.00	22.00	15.00
A2007wvs-2X11P	20.00	24.00	17.00
A2007wvs-2X12P	22.00	26.00	19.00
A2007wvs-2X13P	24.00	28.00	21.00
A2007wvs-2X14P	26.00	30.00	2300
A2007wvs-2X22P	42.00	46.00	39.00

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL
1					
2					

GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.° ±2°				GYA 东莞市国亚电子有限公司 Connectors Dong Guan Guo Ya Connectors co., Ltd.				PART NO. A2007WVS-2*NP-XXXX				
PROJECT 				APPROVAL	CHECK	DRAWN	DATE	TITLE 2.00mm Crimp Style Connectors				
				Yangzhengguo	Yangjinyi	Lvtiansheng	2016/08/26	UNIT	SCALE	SHEET	REV	NUMBER
								mm	1:1	1/1	A0	A-022